


# CLIFF 700

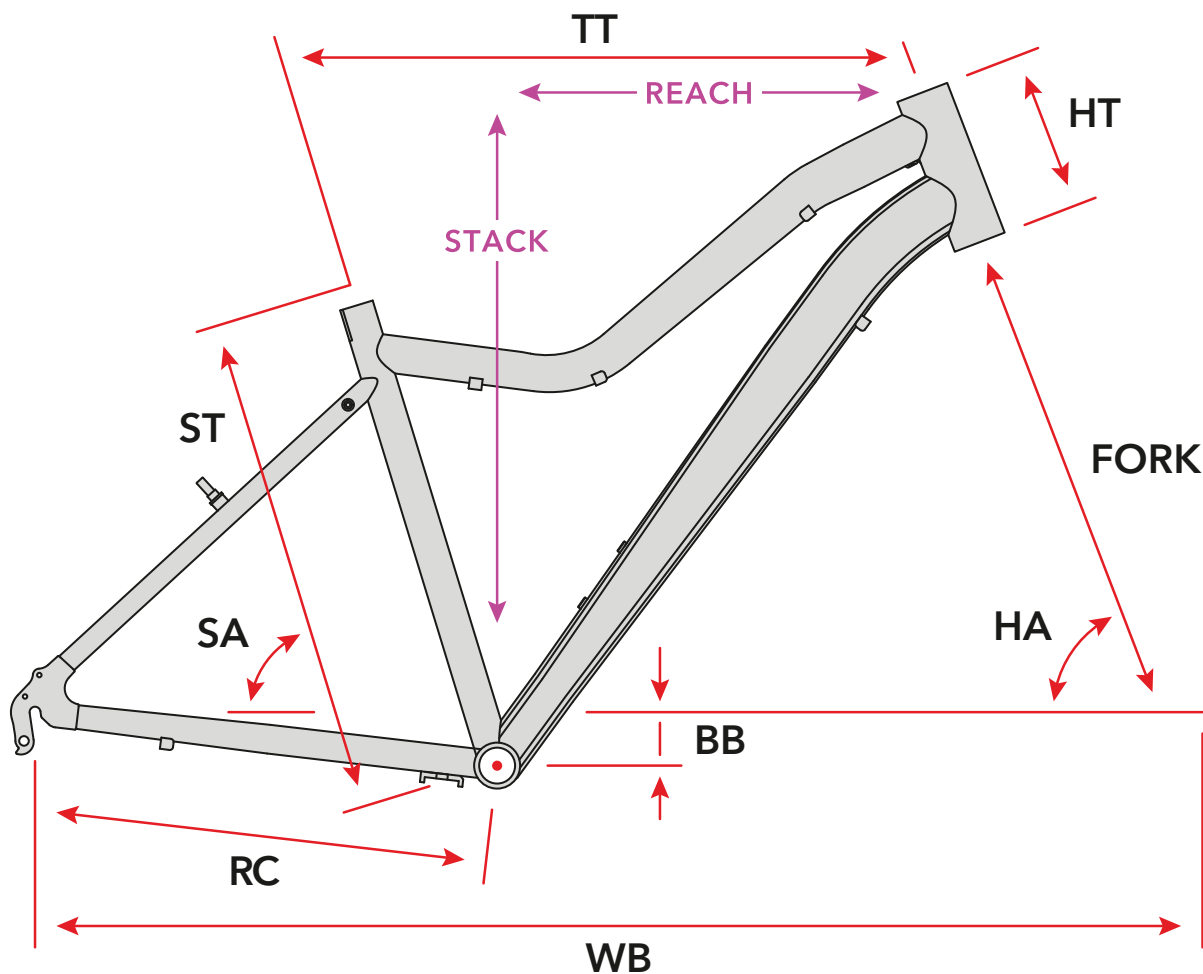

		XS	S	M	L	XL
<b>ST</b>	HAUTEUR	350	400	450	500	550
<b>TT</b>	LONGUEUR	540	565	590	610	630
<b>HT</b>	DOUILLE DE DIRECTION	130	140	150	160	170
<b>FORK</b>	FOURCHE (80MM)	485	485	485	485	485
<b>HA</b>	ANGLE DE DIRECTION	69°	69°	69°	69°	69°
<b>SA</b>	ANGLE DE TUBE DE SELLE	73°	73°	73°	73°	73°
<b>BB</b>	HAUTEUR DE BOITIER	-50	-50	-50	-50	-50
<b>RC</b>	LONGUEUR DES BASES	435	435	435	435	435
<b>WB</b>	EMPATTEMENT	1040	1066	1092	1112	1133
<b>REACH</b>		353	375	398	415	433
<b>STACK</b>		611	620	630	639	648